


Direct Vent Gas Fireplaces



Add a touch of style and warmth to any room.

ELOQUENCE

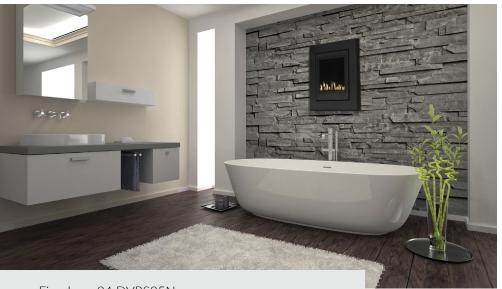

Input rating

Valve Type

Natural Gas: 14,000 - 25,000 BTU/hr

/ 4..10 - 7.33 Kw/hr

Propane: 14,000 - 25,000 BTU/hr /

4..10 - 7.33 Kw/hr

Efficiencies

Steady State: 75.67% **P4 Fireplace Efficiency:** 74.96%

Fireplace: 24 DVRS25N Black Surround with Black Door

Surrounds and Doors



Black Door with Black Surround



Nickel Door with Nickel Surround



Black Door with Nickel Surround





Nickel Door with Black Surround

Eloquence: Clearly demonstrating, expressing, or indicating something.

The 24-DVRS25N demonstrates beautiful styling in your modern home without sacrificing efficiency. With its unique slim, portrait style and variable door and surround options, the 24-DVRS25N adds life to any space regardless of the shape or size of the room.

TECHNICAL SPECIFICATIONS

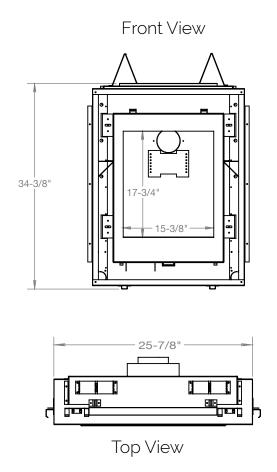

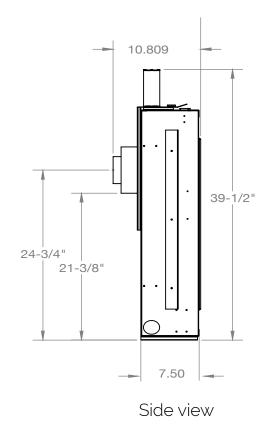

Standard Features

Remote Control: Multi Function remote control system c/w smart thermostat

Interior Lining: Black fiber Ceramic Glass Door: Included Barrier Screen: Included

Viewing Area: 15-3/8" W x 17-3/4" H Vent Size: 4 x 6-5/8" rigid, rear, 4" 7" flex Buner Type: Wall To wall Steel Pan

Firebox and Host Shell Construction Welded/rivet and gasket, silicone free. Host shell has removable

firebox which allows the shell to be installed without the firebox.

Warranty: Limited lifetime

Clearance to Combustion

Framing Demensions: 26-1/2" W x 39-1/2"H x 5-1/2" D

Room Clearance Measured outer shell

Sidewall: 4" Floor: 4" Ceiling: 2"

Mantel: 9" (Based on 8" deep matel)

Options

Interior Lining: Reflective Glass


Pane

Propane: Optional Door: Black and Nickel Surround: Black and Nickel

See owner's manual for framing instructions and clearence to combustible guides. For more information and pictures visit brigantiafireplaces.com All fireplaces come standard with barrier screens which attach to the door with very little effort.



PERFECTION

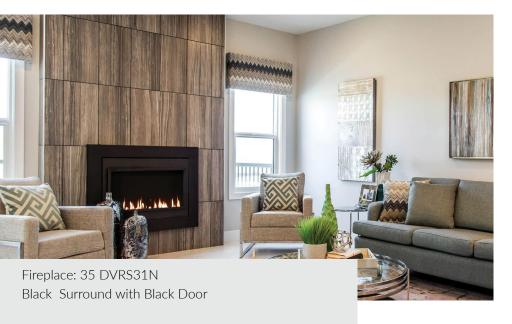

Input rating

Valve Type

Natural Gas: 16,000 - 31,000 BTU/hr

/ 4..69 - 9.1 Kw/hr

Propane: 16,000 - 31,000 BTU/hr

/ 4..69 - 9.1 Kw/hr

Efficiencies

Steady State: 73.19% **P4 Fireplace Efficiency**: 75.40%

Surrounds and Doors



Black Door with Black Surround



Nickel Door with Nickel Surround



Black Door with Nickel Surround





Nickel Door with Black Surround


Perfection: The condition of being free or as free as possible from all flaws or defects.

The slim fit design of tht 35 DVRS31Noffers installation convenience and completes your flawless modern home with a breathtaking smooth and elegant view of the fire. Watch as the 35-DVRS31N becomes the centerpiece of your home; gathering family and guests around its stylish flame.

TECHNICAL SPECIFICATIONS

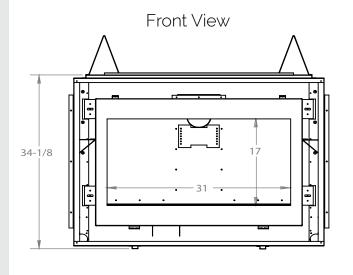



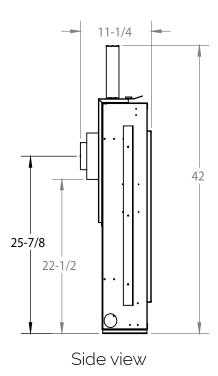

Top View

Standard Features

Remote Control: Multi Function remote control system c/w smart thermostat

Interior Lining: Black fiber Ceramic Glass Door: Included Barrier Screen: Included Viewing Area: 31" W x 17" H

Vent Size: 4 x 6-5/8" rigid, 4 x 7" flex, terminates vertical or horizontal

Buner Type: Wall To wall Steel Pan

Firebox and Host Shell Construction: Welded/rivet and gasket, silicone free. Host shell has removable

firebox which allows the shell to be installed without the firebox.

Warranty: Limited lifetime

Clearance to Combustion

; Framing Demensions 42-1/2 W \times 42 H \times 5-1/2 D

Room Clearance Measured outer shell

Sidewall: 4" Floor: 4" Ceiling: 14"

Mantel: 9" (Based on 8" deep matel)

Options

Interior Lining: Reflective Glass

Panel


Propane: Optional Door: Black and Nickel Surround: Black and Nickel

See owner's manual for framing instructions and clearence to combustible guides. For more information and pictures visit **brigantiafireplaces.com**. **All fireplaces come standard with barrier screens which attach to the door with very little effort**.





EXCELLENCE

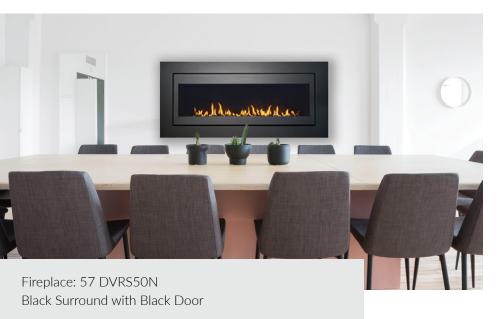

Input rating

Valve Type

Natural Gas: 16,000 - 31,000 BTU/hr

/ 4..69 - 9.1 Kw/hr

Propane: 16,000 - 31,000 BTU/hr

/ 4..69 - 9.1 Kw/hr

Efficiencies

Steady State: 72.01% **P4 Fireplace Efficiency**: 72.74%

Surrounds and Doors



Black Door with Black Surround



Nickel Door with Nickel Surround



Black Door with Nickel Surround




Nickel Door with Black Surround


Excellence: The quality of being outstanding.

Why would you add a traditional gas burning fireplace to your modern home? The 57-DVRS50N will fill your larger spaces with a flame that stands out. Efficiency is a key element for any modern home. Most larger fireplaces sacrifice efficiency in order to bring a larger flame. Sacrifice nothing with the slim, efficient, and outstanding 57-DVRS50N.

TECHNICAL SPECIFICATIONS

Front View

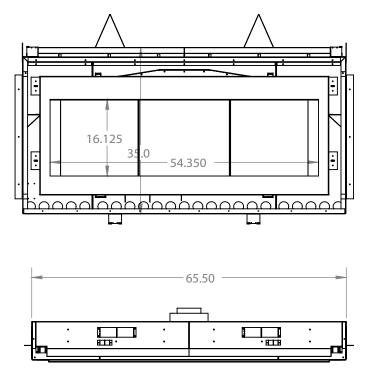



Side view

Top View

Standard Features

Remote Control: Multi Function remote control system c/w smart thermostat

Interior Lining: Black fiber Ceramic Glass Door: Included Barrier Screen: Included

Viewing Area: 54.35" W x 16.12" H Vent Size: 5 x 8" rigid or flex Buner Type: Wall To wall Steel Pan

Firebox and Host Shell Construction Welded/rivet and gasket, silicone free. Host shell has removable

firebox which allows the shell to be installed without the firebox.

Warranty: Limited lifetime

Clearance to Combustion

Framing Demensions: 66-1/2" W x 42"H x 6" D

Room Clearance Measured outer shell

Sidewall: 18" Floor: 5" Ceiling: 36"

Mantel: 9" (Based on 8" deep matel)

Options

Interior Lining: Reflective Glass

Panel

Propane: Optional
Door: Black and Nickel
Surround: Black and Nickel

See owner's manual for framing instructions and clearence to combustible guides. For more information and pictures visit brigantiafireplaces.com. All fireplaces come standard with barrier screens which attach to the door with very little effort.





